



KOLARC

BUILDING THE FUTURE



I prodotti Kolarc sono distribuiti
in esclusiva per l'Italia da:

AGINT
INNOVATIVE WELDING

Attrezzature AGINT s.r.l.

Via Privata Alzaia Trieste, 3 20090 Cesano Boscone (MI)
+39 02 4945 1414 | info@agint.com | www.agint.com

Robotic Interfaces

Ethernet

Others



DeviceNet

EtherNet/IP

CANopen



EtherCAT



TX400 W



TX270



TECHNICAL SPECIFICATIONS


| | |
|-------------------------|---|
| Input Voltage | 400 V |
| Mains Voltage Tolerance | - 10 % / + 15 % |
| Minimum Welding Current | 10 A |
| Maximum Welding Current | 400 A |
| TIG Duty Cycle, 40°C | 400 A %40, 360 A %60, 320A %100 |
| MMA Duty Cycle, 40°C | 400 A %40, 360 A %60, 320A %100 |
| Open – Circuit Voltage | 58 V - 75 V |
| Weight | Liquid Cooled, 65 kg |
| Standard Accessories | 5 m Power Cable (4 x 4 mm ²) 5 m Earth Clamp (50 mm ²) Gas Hose (1.5 m) |
| Dimensions (L, B, H) | 532mm x 860mm x 974mm |
| Certification | CE |

| |
|---|
| 400 V |
| - 10 % / + 15 % |
| 10 A |
| 270 A |
| 270 A %40, 230 A %60, 200 A %100 |
| 270 A %40, 230 A %60, 200 A %100 |
| 58 V - 75 V |
| Air Cooled, 12 kg |
| 5 m Power Cable (4 x 2.5 mm ²) |
| 5 m Earth Clamp (35 mm ²) |
| Gas Hose (1.5 m) |
| 175mm x 310mm x 493mm |
| CE |


TX220




230 V
- 10 % / + 15 %
10 A
220 A
220 A %13, 90 A %100
220 A %13, 90 A %100
58 V - 75 V
Air Cooled, 12 kg
5 m Power Cable (3 x 2.5 mm²)
5 m Earth Clamp (35 mm²)
Gas Hose (1.5 m)
175mm x 310mm x 493mm
CE

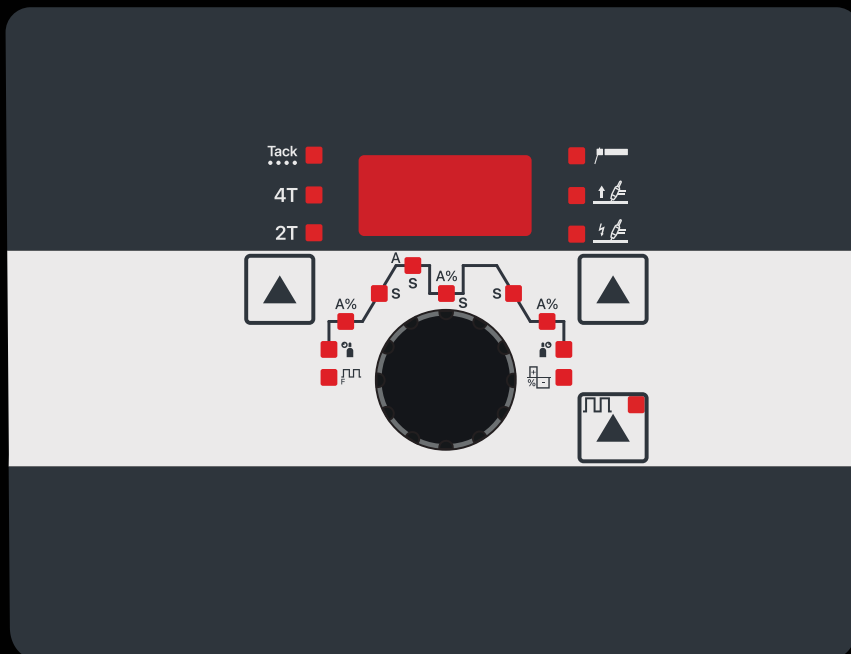


TX400

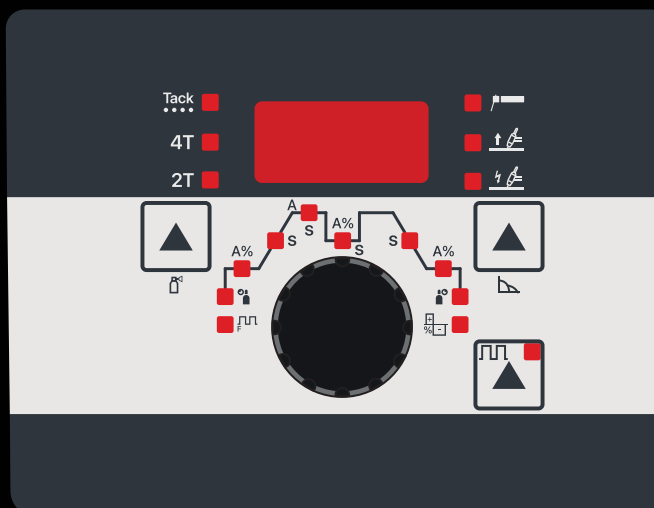


TX270-220



ArcForce

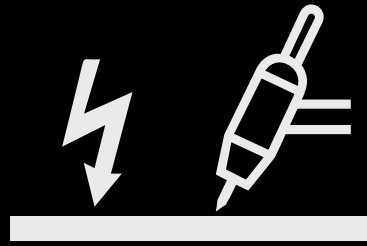

HF

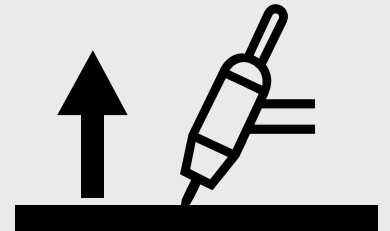


Lift TIG

4T / 2T


Tack



Hot Start

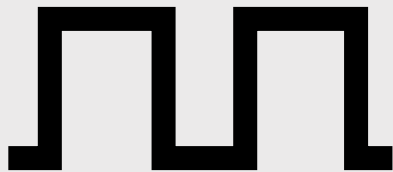

F
Pulse

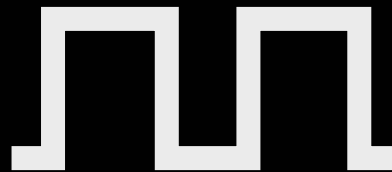

S
Pulse

IP23

Modular Design