



KOLARC

BUILDING THE FUTURE



Robotic Interfaces

Ethernet

Others



DeviceNet™

EtherNet/IP™

CANopen®



EtherCAT™



XS400



TECHNICAL SPECIFICATIONS

Input Voltage	400 V
Mains Voltage Tolerance	- 10 % / + 15 %
Minimum Welding Current	10 A
Maximum Welding Current	400 A
TIG Duty Cycle, 40°C	400 A %40, 360 A %60, 320 A %100
MMA Duty Cycle, 40°C	400 A %40, 360 A %60, 320 A %100
Open – Circuit Voltage	75 V
Weight	25 kg
Standard Accessories	3 m Power Cable (4 x 4 mm ²) 3 m Earth Clamp (50 mm ²) 5 m Electrode Holder (50mm ²)
Dimensions (L, B, H)	372mm x 242mm x 497mm
Certification	CE

XS270



Input Voltage	230 V
Mains Voltage Tolerance	- 10 % / + 15 %
Minimum Welding Current	10 A
Maximum Welding Current	270 A
TIG Duty Cycle, 40°C	270 A %40, 230 A %60, 200 A %100
MMA Duty Cycle, 40°C	270 A %40, 230 A %60, 200 A %100
Open – Circuit Voltage	75 V
Weight	25 kg
Standard Accessories	4 m Power Cable (4 x 2.5 mm ²) 3 m Earth Clamp (35 mm ²) 5 m Electrode Holder (35mm ²)
Dimensions (L, B, H)	372mm x 242mm x 497mm
Certification	CE

XS220




230 V
- 10 % / + 15 %
10 A
220 A
220 A %40, 185 A %60, 160 A %100
190 A %40, 150 A %60, 120 A %100
75 V
25 kg
4 m Power Cable (4 x 2.5 mm²)
3 m Earth Clamp (35 mm²)
5 m Electrode Holder (35mm²)
175mm x 493mm x 310mm
CE


XS160



230 V
- 10 % / + 15 %
10 A
160 A
160 A %35, 110 A %60, 90 A %100
160 A %35, 110 A %60, 90 A %100
75 V
12 kg
4 m Power Cable (3 x 2.5 mm²)
2 m Earth Clamp (16 mm²)
3 m Electrode Holder (16mm²)
175mm x 493mm x 310mm
CE



Standard MMA




Lift TIG




Hot Start




Arc Force

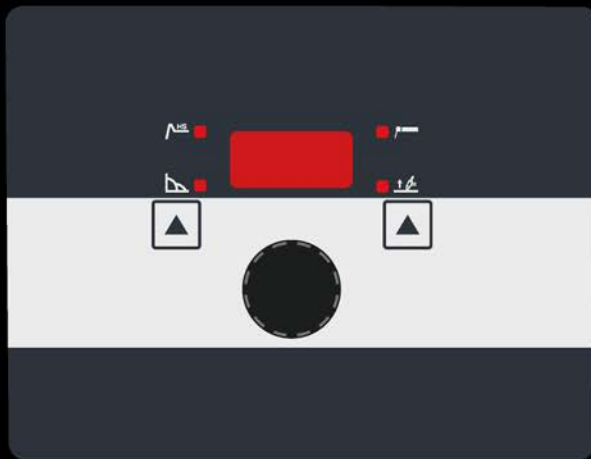

XS400

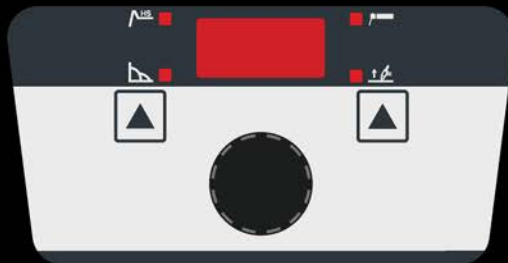

XS270-XS220

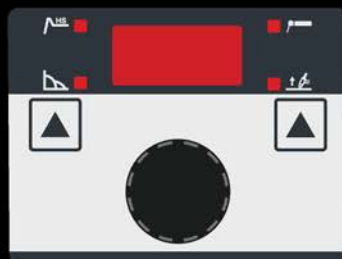

XS160

KOLARC

I prodotti Kolarc sono distribuiti in esclusiva per l'Italia da:

AGINT
INNOVATIVE WELDING

Attrezzature **AGINT** s.r.l.

- +39 02 4945 1414
- Via Privata Alzaia Trieste, 3
20090 Cesano Boscone (MI)
- info@agint.com
- www.agint.com



www.kolarc.com