



KOLARC

BUILDING THE FUTURE



I prodotti Kolarc sono distribuiti in esclusiva per l'Italia da:

Attrezzature AGINT s.r.l.

Via Privata Alzaia Trieste, 3 20090 Cesano Boscone (MI)

+39 02 4945 1414 | info@agint.com | www.agint.com

AGINT
INNOVATIVE WELDING

Robotic Interfaces

Ethernet

Others



DeviceNet

EtherNet/IP

CANopen



PROFIBUS

EtherCAT



XT400 W Pulse



TECHNICAL SPECIFICATIONS

Input Voltage	400 V
Mains Voltage Tolerance	- 10 % / + 15 %
Minimum Welding Current	10 A
Maximum Welding Current	400 A
TIG Duty Cycle, 40°C	400 A %40, 360 A %60, 320A %100
MMA Duty Cycle, 40°C	400 A %40, 360 A %60, 320A %100
Open – Circuit Voltage	58 V - 75 V
Weight	Liquid Cooled 94 kg
Standard Accessories	3 m Power Cable (4 x 4 mm ²) 3 m Earth Clamp (50 mm ²) Gas Hose (1.5 m) Torch, XT19 4m
Dimensions (L, B, H)	532mm x 860mm x 974mm
Certification	CE

XT270 Pulse



Input Voltage	400 V
Mains Voltage Tolerance	- 10 % / + 15 %
Minimum Welding Current	10 A
Maximum Welding Current	270 A
TIG Duty Cycle, 40°C	270 A %40, 230 A %60, 200 A %100
MMA Duty Cycle, 40°C	270 A %40, 230 A %60, 200 A %100
Open – Circuit Voltage	58 V - 75 V
Weight	Air Cooled 12 kg
Standard Accessories	4 m Power Cable (4 x 2.5 mm ²) 3 m Earth Clamp (50 mm ²) Gas Hose (1.5 m) Torch, XT27 4m
Dimensions (L, B, H)	175mm x 310mm x 493mm
Certification	CE

XT220 Pulse



230 V

- 10 % / + 15 %

10 A

190 A

220 A %40, 185 A %60, 160 A %100

190 A %40, 150 A %60, 120 A %100

58 V - 75 V

Air Cooled 12 kg

3m Power Cable (3 x 2.5 mm²)


3 m Earth Clamp (16 mm²)

Gas Hose (1.5 m)


Torch, XT27 4m

175mm x 310mm x 493mm



CE

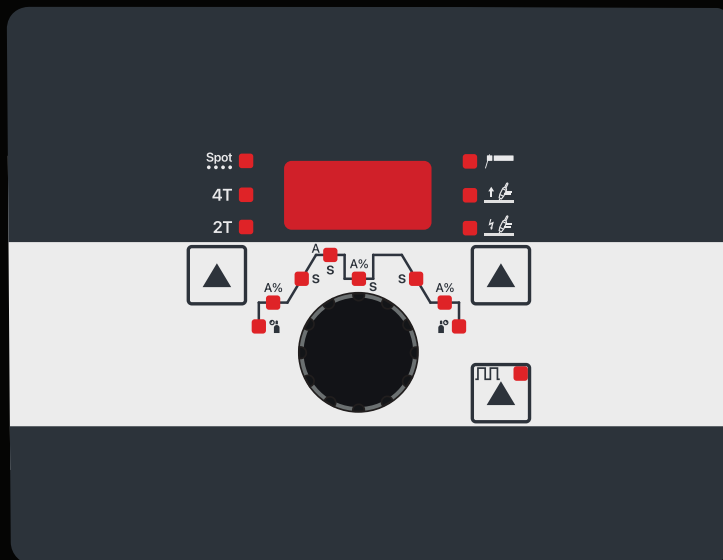


XT400

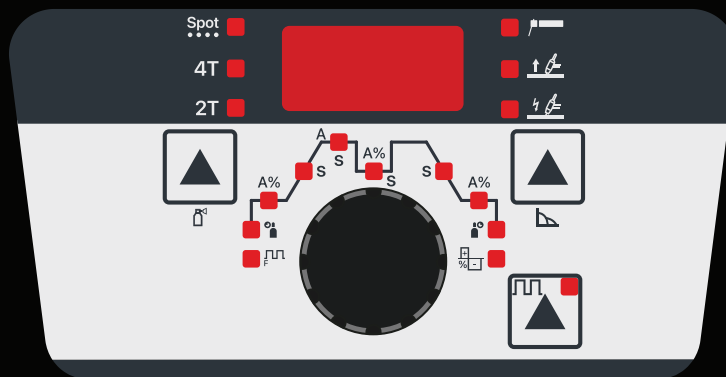

XT220-XT270

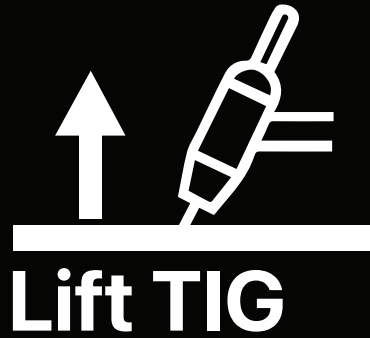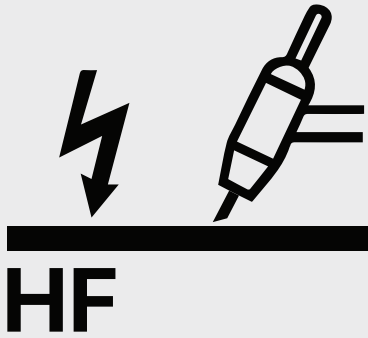



Spot



The word "Spot" is written in a large, bold, sans-serif font. Below it are four solid black circles arranged horizontally, representing the spot welding process.

4T / 2T

The text "4T / 2T" is written in a large, bold, sans-serif font, with a diagonal slash separating the two values.

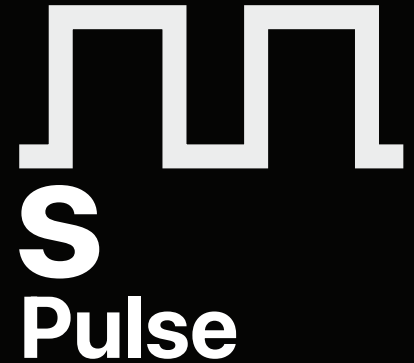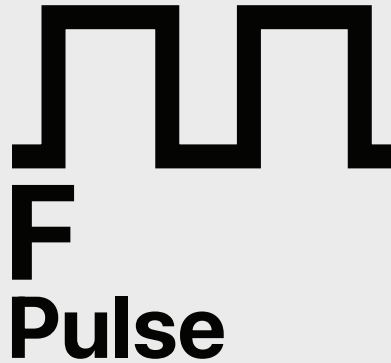


IP23

Modular Design



Hot Start

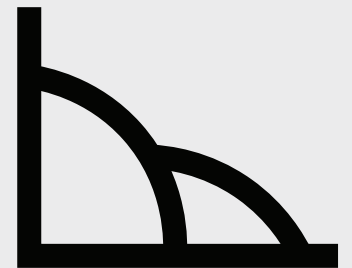

ArcForce